





ARGOSY ALUMINUM HONEYCOMB

ARGOSY 5000 SERIES ALUMINUM HONEYCOMB

ARGOSY 5000 Series Aluminum Honeycomb is a lightweight honeycomb core that has a regular hexahedron structure; high-quality aluminum foil is selected for phosphorous anodization or chromizing. Features include low density, high strength, rigidity, shock resistance, sound shock absorption, acoustic absorption, and thermal insulation. The product displays excellent dynamic performance and corrosion resistance. Manufactured to AMS-C-7438 Standards.

TYPICAL APPLICATIONS

ARGOSY 5000 Series Aluminum Honeycomb is widely used in aerospace components including radome, wing, tailcone, and floor applications.

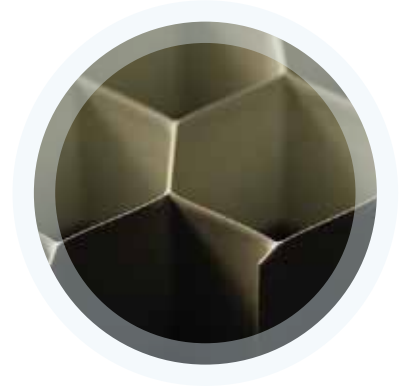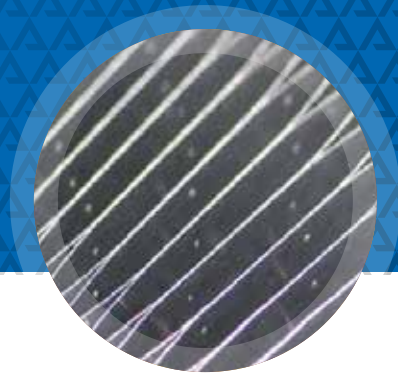

TECHNICAL DATA

	PRODUCT FEATURES
Density (g/cm ³)	1.4 pcf - 9 pcf (22.4 kg/m ³ - 144 kg/m ³)
Aluminum Foil Thickness	0.018 mm - 0.07 mm
Cell Specifications	1/8" - 3/8" (3 mm - 5 mm)
Side Length of Cell	1.8 mm - 5.5 mm
Thickness of Honeycomb Core Slice	0.12" - 35" (3 mm - 900 mm) tolerance +/- 0.1 mm
Length W and Width L	48" x 96" standard size, expanded honeycomb
BC-5.01-3-N-5052 (48L X 96W)	SERIES 5000 MARK OF SPECIFICATIONS
BC	B - Block; S - Slice; E - Expanded; C - Coated with Chromate; UC - Uncoated; NC - Non-Chrome Coated; PPA - Phosphate Anodization Treatment
5.01	Honeycomb Density, Unit: lb/foot ³
3	Cell Size, Side Length of Cell, Unit: mm
N	N - Non-perforated; P - Perforated
5052	Aluminum Foil 5052
(48L X 96W)	48L - Length, Unit: inch; 96W - Width, Unit: inch

MECHANICAL PROPERTIES

NOMINAL CORE DENSITY, PCF	CELL SIZE INCH	THICKNESS OF ALUMINUM FOIL INCH	COMPRESSIVE STRENGTH (PSI)	L SHEAR STRENGTH (PSI)	W SHEAR STRENGTH (PSI)
1	3/8	0.0007"	20.3	27.55	20.3
1.3	3/8	0.0011"	62.25	82.5	60.6
1.8	3/8	0.0016"	87	107.3	59.45
2.37	3/8	0.0020"	137.75	100	57
3.6	3/8	0.0028"	282.75	205	120
4.2	3/8	0.0030"	359.6	255	150
1.6	1/4	0.0007"	69.6	60	32
2.72	1/4	0.0016"	118.9	105	58
3.4	1/4	0.0020"	261	180	105
5.2	1/4	0.0028"	510.4	319	185.6
6.0	1/4	0.0030"	532.15	445	265
6.3	1/4	0.0032"	557.5	450	270
2.0	3/16	0.0007"	100.05	80	46
3.1	3/16	0.0011"	214.6	155	90
4.4	3/16	0.0016"	385.7	324.8	213.15
5.7	3/16	0.0020"	600.3	410	244
6.9	3/16	0.0025"	800.4	540	328
8.1	3/16	0.0030"	1100.55	437.9	285.65
4.5	1/8	0.0016"	533.6	285	168
10.9	1/8	0.0028"	1751.6	860	490
11.2	1/16	0.0020"	2125.7	1020	650

*Information contained above is typical only and should be verified for any specific applications.

FOR ADDITIONAL INFORMATION

CONTACT sales@argosyinternational.com or honeycomb@argosyinternational.com

For more information, please visit argosyinternational.com

IMPORTANT NOTICE:

The information and statements herein we believe to be reliable but are not to be construed as a warranty or representation for which Argosy assumes legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein.

No warranty of fitness for a particular purpose is made. Nothing herein is to be taken as permission, inducement or recommendation to practice any patent invention without a license. Argosy makes no warranties, expressed or implied. User is responsible for determining whether this product is fit for a particular purpose and suitable for user's method of application.

Liability for any incidental or consequential damage or loss is specifically excluded at all times. Copyright © 2016.